


STYLE 573 HYTREL BACK-UP RINGS

Molded of 55D Durometer Hytrel, these back-up rings provide excellent extrusion resistance and tolerance to fluids such as phosphate esters, hydraulic oil and water. Stretched for installation, they return quickly to their original size for easy installation. SIZES (DASH NO.) CORRESPOND TO O-RING NUMBERS.

PART NUMBERS



SEAL INFORMATION	
MATERIAL	55D HYTREL
TEMPERATURE RANGE	-65° TO +275° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE

Part Number	Min. Qty.	Pkg.	List Price
014-015	10		\$.51
016-019	10		.61
020-021	10		.61
022-025	10		.61
026-032	10		.68
033-038	10		.72
039	10		.75
040	10		.79
041-043	10		.82
044-045	2		1.16
047	2		1.23
048-050	2		1.40
112	9		.56
114-116	9		.51
117-119	9		.56
120	8		.59
122-123	8		.59
124-125	8		.61
126-139	8		.68
140-142	7		.70
143	7		.72
144-149	6		.75
150-151	6		.79
152	5		1.06
153	5		1.08
154	3		1.66
155	3		1.68
158	3		1.79
159	3		1.83
160	3		1.87
161	3		1.91
162	3		1.96
163	3		2.43
205-209	10		.51
210-214	9		.56
215-219	9		.59
220-222	10		.61
223-224	8		.63
225-229	10		.68
230-232	7		.77

Part Number	Min. Qty.	Pkg.	List Price
233	7		\$.77
234-236	6		.84
237	5		.98
239	5		1.19
240-243	5		1.22
244-245	4		1.49
246-247	3		1.70
248-249	3		1.89
250	3		1.96
251	3		2.12
252	3		2.23
253	3		2.36
254	3		2.46
255	2		2.55
256	2		2.66
257	2		2.82
258	2		2.90
259	2		2.90
260	2		3.03
261	2		3.16
262	2		3.22
263	2		3.36
264	2		3.59
265	2		3.78
266	2		4.40
267	2		4.46
268-269	2		4.58
270	1		4.71
271	1		4.82
272	1		4.87
273	1		4.94
309-311	10		.51
312-313	9		.56
314-322	8		.59
323	8		.63
324-325	8		.63
326-327	8		.68
328	8		.77
329-330	8		.68
331	8		.68

Part Number	Min. Qty.	Pkg.	List Price
332-333	8		\$.70
334	7		.72
335	7		.77
336	7		.77
337	7		.82
338	7		.82
339	6		.87
340	6		.93
341	6		.93
342	5		1.00
343	5		1.12
344	4		1.26
345	4		1.38
346	4		1.47
347	4		1.54
348	4		1.64
350	3		1.75
351	3		1.96
352	3		2.00
353	3		2.02
354	3		2.10
355	3		2.23
356	3		2.31
357-358	2		2.53
359	2		2.66
360	2		2.80
361-364	2		2.98
366-368	2		2.98
369-371	2		3.17
372	2		3.23
375	2		3.35
425	3		1.83
426	3		1.85
427	3		2.32
428	3		2.38
429	3		2.38
430	3		2.40
431	3		2.43
432	2		2.53
433	2		2.64

Part Number	Min. Qty.	Pkg.	List Price
434	2		\$ 2.76
435	2		2.85
436	2		2.87
437	2		2.95
438	2		3.01
439	2		3.09
440	2		3.34
441	2		3.49
442	2		3.65
443	2		4.33
444	1		5.75
445	1		5.58
446	1		7.43
447	1		7.74
448	1		7.85
449	1		7.85
450	1		8.51
455	1		8.51


STYLE 574 BUNA-N BACK-UP RINGS

Molded of 90A Durometer Buna-N Rubber, these "Parback®" Style Dished Cross Section back-up rings provide excellent extrusion resistance. Stretched for installation, they return quickly to their original size for easy installation. SIZES CORRESPOND TO O-RING NUMBERS.



"Parback®" Style Dished Cross Section

PART NUMBERS



SEAL INFORMATION	
MATERIAL	90A BUNA-N RUBBER
TEMPERATURE RANGE	-40° TO +240° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE

Part Number	Min. Qty.	Pkg. Qty.	List Price	Part Number	Min. Qty.	Pkg. Qty.	List Price	Part Number	Min. Qty.	Pkg. Qty.	List Price	Part Number	Min. Qty.	Pkg. Qty.	List Price
004	20		\$.22	125	16		\$.28	178	2		\$ 4.29	248	4		\$ 1.36
006	25		.18	126	14		.32	207	23		.20	249	4		1.39
007	25		.17	127	14		.31	208-210	22		.21	250	3		1.54
008	20		.18	128	15		.32	211	21		.22	251	3		1.60
009-011	25		.18	129	14		.33	212	21		.23	252	3		1.73
012	23		.19	130	14		.34	213	20		.23	253	3		1.79
013-014	22		.20	131-132	13		.35	214	20		.24	254	3		1.89
015-017	21		.21	133	13		.36	215	20		.24	255	3		1.91
018-019	20		.22	134	13		.37	216	18		.25	256	3		2.04
020	19		.23	135	12		.37	217	18		.26	257	3		2.10
021-022	19		.24	136-137	11		.41	218	18		.26	258	3		2.17
023	18		.25	138	10		.45	219	17		.28	259	2		2.29
024-025	17		.26	139	10		.46	220	16		.61	260	2		2.35
026	16		.27	140-141	10		.47	221	15		.30	261	2		2.49
027-028	15		.29	142	10		.49	222	14		.32	262	2		2.72
029	14		.32	143	9		.51	223	14		.34	263	2		2.85
030	13		.34	144-145	9		.52	224	13		.37	264	2		3.27
031	13		.35	146	9		.55	225	11		.41	265	2		3.31
032	12		.36	147-148	8		.56	226	11		.44	266	2		3.50
033	11		.41	149	8		.57	227	10		.47	267	2		3.65
034-035	10		.47	150	8		.62	228	10		.49	268	2		3.75
036	9		.49	151	7		.70	229	9		.53	269	2		3.84
037	9		.51	152	5		.92	230	9		.55	270	2		4.02
038	8		.54	153	5		1.05	231	8		.58	271	2		4.18
039	8		.58	154	4		1.30	232	7		.65	272	2		4.33
040	7		.67	155	4		1.42	233	7		.66	273	1		4.49
041-043	6		.82	156	3		1.67	234	6		.72	274	1		4.65
044-045	4		1.16	157	3		1.69	235	6		.78	275	1		5.04
046-047	4		1.23	158	3		1.79	236	6		.79	276	1		5.46
048-050	3		1.40	159	3		1.83	237	6		.80	277	1		5.47
108	25		.18	160	3		1.87	238	6		.82	278	1		5.78
109-112	23		.19	161	3		1.91	239	5		.82	279	1		6.63
113-115	22		.20	162	3		1.96	240	5		.91	280	1		7.29
116	21		.21	163-168	2		2.43	241	5		.92	281	1		9.22
117	20		.22	169	2		2.95	242	5		1.22	282	1		10.24
118-119	19		.23	170	2		3.11	243	5		1.05	283	1		10.85
120	19		.24	171	2		3.41	244	5		1.00	284	1		11.04
121	18		.25	172-175	2		2.57	245	4		1.14	309	21		.21
122-123	17		.26	176	2		4.02	246	4		1.23	310	20		.23
124	17		.27	177	2		4.17	247	4		\$ 1.30	311-312	19		\$.24

STYLE 574 BUNA-N BACK-UP RINGS

BACK-UP RINGS

Part Number	Min. Qty.	Pkg. Price	List Price	Part Number	Min. Qty.	Pkg. Price	List Price	Part Number	Min. Qty.	Pkg. Price	List Price	Part Number	Min. Qty.	Pkg. Price	List Price
313-314	18		.25	342	5		\$ 1.00	372-373	2		\$ 3.23	444	2		\$ 4.10
315	18		.28	343	4		1.12	374	1		3.97	445	2		4.14
316	18		.26	344	4		1.23	378	1		5.28	446	2		4.27
317	17		.27	345	4		1.28	380	1		6.18	447	2		4.35
319	15		.30	346	4		1.28	381	1		6.66	448	1		4.67
320	14		.32	347	4		1.29	382	1		7.19	449	1		5.58
321	13		.35	348	4		1.64	383	1		7.19	450-456	1		8.51
322	13		.36	349	4		1.38	425	3		1.81	457	1		7.93
323	12		.38	350	3		1.75	426	3		1.85	458	1		8.28
324	12		.63	351	3		1.53	427	3		1.87	459	1		15.34
325	11		.63	352	3		1.55	428	3		1.89	460	1		16.28
326	10		.68	353	3		1.65	429	3		1.92	463	1		13.00
327	10		.48	354	3		1.78	430	3		2.19	464	1		14.46
328	9		.53	355	3		1.90	431	2		2.34				
329	8		.60	356	3		1.95	432	2		2.40				
330	8		.62	357	3		2.11	433-434	2		2.45				
331	7		.65	358	3		2.13	435	2		2.47				
332	7		.67	359	3		2.17	436	2		2.53				
333	7		.70	360	2		2.23	437	2		2.73				
334	7		.72	361	2		2.25	438	2		3.22				
335-336	6		.77	362	2		2.57	439	2		3.25				
337-338	6		.82	363	2		2.77	440	2		3.29				
339	6		.87	364	2		2.81	441	2		3.49				
340	6		.93	365-368	2		2.98	442	2		3.65				
341	5		.93	369-371	2		3.17	443	2		4.03				


***If you don't see the size you need,
give us a call...***

We are adding new sizes everyday!

STYLE 575 URETHANE BACK-UP RINGS

Molded of 90A durometer urethane these back-up rings provide excellent extrusion resistance. Stretched for installation, they return quickly to their original size for easy installation. SIZES CORRESPOND TO O-RING NUMBERS.

PART NUMBERS




SEAL INFORMATION	
MATERIAL	95A DUROMETER URETHANE
TEMPERATURE RANGE	-65° TO +220° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE

Part Number	Min. Qty.	Pkg. Price	Part Number	Min. Qty.	Pkg. Price	Part Number	Min. Qty.	Pkg. Price	Part Number	Min. Qty.	Pkg. Price
004	10	\$.72	210-214	9	\$.56	275	1	\$ 5.04	361-368	2	\$ 2.98
005-010	10	.72	215-219	9	.59	276	1	5.46	369-371	2	3.17
011-015	10	.51	220-222	10	.61	278	1	5.78	372-373	2	3.23
016-019	10	.61	223-224	8	.63	279	1	5.78	374-377	2	3.35
020-021	10	.61	225-229	10	.68	309-311	10	.51	379	1	4.73
022-025	10	.61	230-232	7	.77	312-313	9	.56	421	3	1.84
026-032	10	.68	233	7	.77	314-322	8	.59	425	3	1.83
033-038	10	.72	234-236	6	.84	323	8	.63	426	3	1.85
039	10	.75	237-238	5	.98	324-325	8	.63	427	3	2.36
040	10	.79	239	5	1.19	326-327	8	.68	428	3	2.38
041-043	10	.82	240-243	5	1.22	328	8	.77	429	3	2.38
044-045	2	1.16	244	4	1.49	329-330	8	.68	430	3	2.40
046-047	2	1.23	244T	1	4.10	331	8	.68	431	3	2.43
048-050	2	1.40	245	4	1.49	332-333	8	.70	432	2	2.53
102-107	9	.56	246-247	3	1.70	334	7	.72	433	2	2.64
108-113	9	.56	248-249	3	1.89	335	7	.77	434	2	2.76
114-116	9	.51	250	3	1.96	336	7	.77	435	2	2.85
117-119	9	.56	251	3	2.12	337	7	.82	436	2	2.87
120-123	8	.59	252	3	2.23	338	7	.82	437	2	2.95
124-125	8	.61	253	3	2.36	339	6	.87	438	2	3.01
126-139	8	.68	254	3	2.46	340	6	.93	439	2	3.09
140-142	7	.70	255	2	2.55	341	6	.93	440	2	3.34
143	7	.72	256	2	2.66	342	5	1.00	441	2	3.49
144-149	6	.75	257	2	2.82	343	5	1.12	442	2	3.65
150-151	6	.79	258	2	2.90	344	4	1.26	443	2	4.33
152	5	1.06	259	2	2.90	345	4	1.38	444	1	5.75
153	5	1.08	260	2	3.03	346	4	1.47	445	1	5.58
154	3	1.66	261	2	3.16	347	4	1.54	446	1	7.43
155	3	1.68	262	2	3.22	348	4	1.64	447	1	7.74
156	3	1.69	263	2	3.36	349	3	1.70	448	1	7.85
157	3	1.69	264	2	3.59	350	3	1.75	448	1	7.85
158	3	1.79	265	2	3.78	351	3	1.96	449	1	7.85
159	3	1.83	266	2	4.40	352	3	2.00	450-456	1	8.51
160	3	1.87	267	2	4.46	353	3	2.02			
160	3	1.87	268-269	2	4.58	354	3	2.10			
161	3	1.91	270	1	4.71	355	3	2.23			
162	3	1.96	271	1	4.82	356	3	2.31			
163-168	3	2.43	272	1	4.87	357-358	2	2.53			
172-175	3	2.57	273	1	4.94	359	2	2.66			
205-209	10	.51	274	1	4.94	360	2	2.80			



STYLE 575 PTFE BACK-UP RINGS

Letter suffix : T= Solid, ST=Split, TS=Spiral Cut, TW = .085 Wide

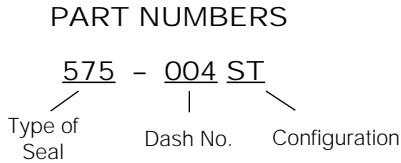

SEAL INFORMATION	
MATERIAL	PTFE
TEMPERATURE RANGE	-40° TO +500° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE

BACK-UP RINGS

Part Number	Min. Qty.	Pkg. Price	Part Number	Min. Qty.	Pkg. Price	Part Number	Min. Qty.	Pkg. Price	Part Number	Min. Qty.	Pkg. Price
-004ST	6	.80	-036T	2	\$ 3.15	-131ST	3	\$ 1.84	-224T	3	\$ 1.67
-005ST	6	.80	-037T	2	3.15	-132ST	3	1.91	-225ST	3	2.02
-006ST	6	.80	-038ST	1	1.74	-133ST	3	1.91	-226ST	5	2.02
-007ST	6	.84	-038T	2	3.15	-134TS	1	3.67	-226TS	2	2.28
-008ST	6	.84	-039T	2	3.15	-134ST	3	2.04	-227ST	3	2.14
-009ST	6	.84	-040T	2	3.26	-135ST	3	2.10	-228ST	2	2.39
-010T	6	.44	-041T	2	3.99	-136ST	3	2.21	-229ST	2	2.65
-011ST	6	.88	-042T	2	4.44	-137ST	3	2.31	-230ST	2	2.73
-012ST	10	.88	-044T	2	6.83	-138ST	2	2.52	-230T	2	2.78
-013ST	6	.88	-045T	2	5.28	-139T	2	2.69	-231T	2	2.78
-014ST	6	.90	-110ST	6	.89	-139TS	1	4.44	-232ST	2	2.90
-015ST	6	.90	-111ST	5	.95	-140T	2	2.69	-232T	2	2.84
-016ST	10	.48	-112ST	5	1.01	-141T	2	2.84	-232TW	1	6.95
-017ST	5	.95	-112T	5	1.01	-144ST	2	3.10	-233T	2	2.94
-018ST	5	.97	-112TS	5	1.01	-146T	2	3.20	-234T	2	3.12
-019ST	5	.97	-113ST	5	1.09	-148T	2	3.36	-236T	2	3.30
-020ST	5	.99	-114ST	4	1.16	-149T	2	3.52	-237T	2	3.49
-020T	5	.99	-114T	5	1.16	-152T	2	3.79	-238T	2	3.68
-021ST	5	.99	-115ST	4	1.22	-159T	1	11.20	-239ST	2	3.94
-022ST	5	.99	-116ST	8	1.22	-210ST	4	1.16	-239T	2	3.94
-022T	5	.99	-116T	4	1.26	-210T	4	1.16	-240T	2	5.83
-023ST	5	.99	-116TS	5	1.00	-211ST	6	1.26	-241ST	2	3.94
-023TS	5	3.00	-117ST	4	1.26	-212ST	4	1.31	-242T	2	4.10
-024ST	5	1.03	-117T	4	1.26	-213ST	4	1.31	-243ST	2	4.54
-025ST	5	1.03	-118ST	4	1.43	-214ST	4	1.32	-244T	1	4.10
-026ST	4	1.16	-118T	4	1.43	-214T	6	.76	-245T	2	4.10
-026T	4	1.16	-119T	3	1.52	-215ST	4	1.32	-247T	2	4.36
-027ST	4	1.32	-120ST	3	1.55	-216ST	4	1.32	-248T	2	4.52
-028ST	4	1.37	-120T	3	1.55	-217ST	4	1.47	-249T	1	4.90
-029ST	3	1.35	-121ST	3	1.55	-218ST	5	1.60	-250T	1	5.31
-029T	3	4.24	-122ST	3	1.55	-218T	5	1.05	-252T	1	5.62
-030ST	3	1.73	-122T	3	1.58	-218TS	5	1.60	-253T	1	5.67
-031ST	2	3.15	-123ST	6	1.68	-219T	1	1.80	-254T	1	5.96
-031T	2	3.15	-124ST	6	1.68	-219ST	3	1.60	-255T	1	6.28
-032T	2	3.15	-125ST	6	1.70	-220ST	3	1.68	-256T	1	6.62
-033ST	2	3.15	-126ST	3	1.70	-220TS	1	1.33	-258T	1	7.29
-033T	2	3.15	-127ST	3	1.70	-221ST	3	1.68	-260T	1	8.00
-034T	2	3.15	-128ST	3	1.74	-221T	3	1.68	-260TS	1	8.45
-035ST	2	3.15	-129ST	3	1.79	-222ST	3	1.79	-261T	1	9.50
-036ST	2	3.61	-130ST	3	1.84	-224ST	3	1.94	-262TS	1	9.21

STYLE 575 PTFE BACK-UP RINGS

Letter suffix as follows: T= Solid, ST=Split, TS=Spiral Cut, TW=.085 Wide

Part Number	Min. Qty.	Pkg. Price	Part Number	Min. Qty.	Pkg. Price	Part Number	Min. Qty.	Pkg. Price	Part Number	Min. Qty.	Pkg. Price
-263ST	1	\$ 13.13	-335T	1	\$ 4.88	-364T	1	\$ 9.63	-437T	1	\$ 16.38
-274T	1	20.37	-336ST	1	4.96	-365T	1	9.92	-438T	1	17.01
-320T	2	3.57	-338ST	1	5.08	-367ST	1	13.28	-440ST	1	17.48
-325ST	2	3.36	-338T	1	3.35	-423-1	1	6.38	-445TS	1	19.01
-325T	2	3.05	-340ST	1	5.15	-425ST	1	9.98	-446T	1	29.43
-326ST	2	3.36	-341ST	1	5.36	-425TS	1	10.03	-447T	1	22.26
-327ST	2	3.83	-342ST	1	5.48	-427ST	1	10.08	-448T	1	23.10
-328T	2	3.99	-344ST	1	6.30	-430ST	1	11.76	-450T	1	27.09
-329ST	1	4.02	-346ST	1	7.09	-430T	1	11.76	-451T	1	29.40
-330ST	2	4.05	-349T	1	4.37	-431ST	1	12.14	-452T	1	30.77
-330T	2	4.05	-356ST	1	11.73	-431T	1	12.52	-454T	1	32.55
-332	1	3.32	-359ST	1	8.61	-432ST	1	12.55			
-333ST	2	4.41	-359T	1	8.61	-433ST	1	14.70			
-333T	2	4.41	-360T	1	8.35	-434ST	1	15.23			
-334ST	2	4.50	-362ST	1	12.50	-436ST	1	16.01			


SPECIAL SIZES

Part Number	I.D.	O.D.	HT.	List Price
575-212TW	7/8	1-1/8	.092	\$ 3.79
575-1-3/16X1-1/2T	1-3/16	1-1/2	1/16	4.39
575-5.12 X 6T	5-1/8	6	1/8	22.94
575-5.5X6.12T	5-1/2	6-1/8	.062	14.47
575-6.12 X 7ST	6-1/8	7	1/8	29.09
575-7 X 8T	7	8	1/8	26.66
575-7.75X8.75X.125T	7-3/4	8-3/4	1/8	39.50
575-9 X 10T	9	10	1/8	41.24
575-13X14T	13	14	1/40	59.78

STYLE 576 SPLIT NYLON BACK-UP RINGS

BACK-UP RINGS

PART NUMBERS



* Items will not be re-ordered when inventory is depleted.


SEAL INFORMATION	
MATERIAL	NYLON
TEMPERATURE RANGE	-40° TO +250° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE

Part Number	I.D.	O.D.	HT.	List Price
576-216	1-1/8	1-3/8	.060	\$ 5.63
576-2.62x3.00	2.62	3	.085	3.57
576-2.62x3.12	2.62	3.12	.060	14.20
576-314	3/4	1-1/8	.070	2.80
576-3.18X3.75	3-3/16	3-3/4	.070	3.68
576-320	1-1/8	1-1/2	.070	2.88
576-324	1-3/8	1-3/4	.070	2.95
576-325	1-1/2	1-7/8	.070	3.02
576-326	1-5/8	2	.070	3.10
576-327	1-3/4	2-1/8	.070	3.17
576-328	1-7/8	2-1/4	.070	3.24
576-329	2	2-3/8	.070	3.32
576-330	2-1/8	2-1/2	.070	3.38
576-331	2-1/4	2-5/8	.070	7.20
576-333	2-1/2	2-7/8	.070	3.45
576-334	2-5/8	3	.070	3.54
576-338	3-1/8	3-1/2	.070	3.59
576-3.4X4.0X1/8	3.405	4	.125	4.16
576-407	2-1/4	2-3/4	.070	2.89
576-408	2-3/8	2-7/8	.070	4.20


Part Number	I.D.	O.D.	HT.	List Price
576-409	2-1/2	3	.070	\$ 3.00
576-411	2-3/4	3-1/4	.070	3.12
576-412	2-7/8	3-3/8	.070	3.23
576-413	3	3-1/2	.070	3.47
576-415	3-1/4	3-3/4	.070	3.58
576-417	3-1/2	4	.070	3.70
576-418-1/2	3-11/16	4-3/16	.070	3.81
576-419	3-3/4	4-1/4	.070	3.91
576-4X5 *	4	5	.125	14.63
576-421	4	4-1/2	.070	4.04
576-423-1	4-1/4	4-3/4	.070	6.38
576-425	4-1/2	5	.070	4.16
576-4.5X5.2 *	4-1/2	5-1/4	.130	4.52
576-427	4-3/4	5-1/4	.070	4.20
576-429	5	5-1/2	.075	4.20
576-433	5-1/2	6	.120	4.27
576-5.5X6.25	5-1/2	6-1/4	.187	5.48
576-6X7 *	6	7	.125	7.67

STYLE 590 HIGH PERFORMANCE BACK-UP RINGS

Style 590 Back-up Rings feature exceptional strength and abrasion resistance along with a 53 SHORE D hardness rating which makes them suitable for high pressure service where extrusion is a problem. Primarily used as a u-seal back-up, these rings can also be used with o-rings. They also retrofit urethane and teflon back-up rings, with greater performance characteristics. "S" suffix designates a split ring.

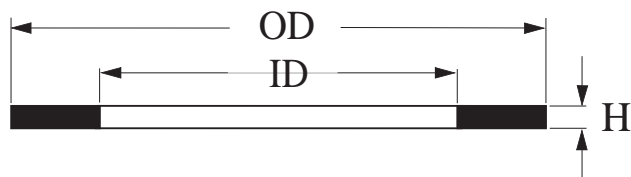

PART NUMBERS




SEAL INFORMATION	
MATERIAL	HIGH PERFORMANCE URETHANE
TEMPERATURE RANGE	-40° TO +275° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE

Part Number	I.D.	O.D.	HT.	List Price
590-15	1/2	3/4	1/16	\$.87
590-17	5/8	7/8	1/16	.90
590-19S	3/4	1	1/16	.94
590-32	1	1-5/16	1/16	1.13
590-34S	1-3/16	1-1/2	1/16	1.18
590-36	1-3/8	1-11/16	1/16	1.23
590-45	1-5/8	2	1/16	1.46
590-45S	1-5/8	2	1/16	1.46
590-46	1-3/4	2-1/8	1/16	1.56
590-48	2	2-3/8	1/16	1.65
590-49	2-1/8	2-1/2	1/16	1.70
590-49S	2-1/8	2-1/2	1/16	1.70
590-54	2-1/2	2-15/16	1/16	1.89
590-57	2-13/16	3-1/4	1/16	1.98
590-57S	2-13/16	3-1/4	1/16	1.98
590-58	3	3-7/16	1/16	2.63
590-66	3-1/2	4	1/16	3.16
590-66S	3-1/2	4	1/16	3.16
590-68	4	4-1/2	1/16	3.35
590-70	4-1/2	5	1/16	3.49
590-70S	4-1/2	5	1/16	3.49
590-73S	4-7/16	5	1/16	3.75
590-75	5	5-9/16	1/16	4.01


Part Number	I.D.	O.D.	HT.	List Price
590-79	5-3/8	6	1/16	\$ 4.10
590-79S	5-3/8	6	1/16	4.10
590-5.43X6S	5-7/16	6	1/16	5.11
590-5.5X6.12	5-1/2	6-1/8	1/16	6.18
590-83	6-3/8	7	1/16	18.07
590-83S	6-3/8	7	1/16	18.07
590-6.43X7S	6-7/16	7	1/16	23.00
590-84	7-3/8	8	1/16	19.90
590-84S	7-3/8	8	1/16	19.90
590-85S	9-5/16	10	1/16	31.38
590-86S	11-1/4	12	1/16	28.86
590-87S	13	14	1/16	63.66
590-228	2-1/4	2-1/2	1/16	7.21
590-237	3-3/8	3-5/8	1/16	1.19
590-338	3-1/2	3-1/2	1/16	1.72
590-341	3-1/2	3-7/8	1/16	2.04
590-345	4	4-3/8	1/16	2.47
590-346	4-1/8	1/2	1/16	2.58
590-349	4-1/2	4-7/8	1/16	2.90
590-354	5-1/8	5-1/2	1/16	3.44

STYLE 595 SOLID PTFE BACK-UP RINGS FOR U-SEALS

Used primarily as an anti-extrusion device for u-seals, these back-up rings combine high performance with very low friction. "ST" suffix designates a split ring.

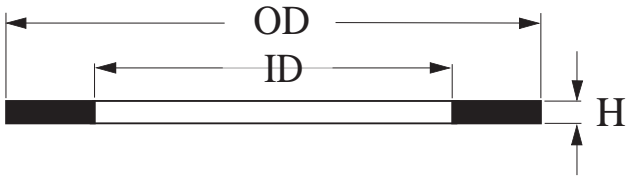

PART NUMBERS



SEAL INFORMATION	
MATERIAL	PTFE
TEMPERATURE RANGE	-40° TO +500° F
PRESSURE RANGE	VARIES ACCORDING TO DIAMETRAL CLEARANCE

Part Number	I.D.	O.D.	HT.	List Price
595-15T	1/2	3/4	1/16	\$ 4.13
595-17T	5/8	7/8	1/16	4.13
595-19ST	3/4	1	1/16	6.08
595-32T	1	1-5/16	1/16	3.15
595-34ST	1-3/16	1-1/2	1/16	6.24
595-36T	1-3/8	1-11/16	1/16	6.24
595-3.62	3-5/8	4	3/31	13.00
595-45ST	1-5/8	2	1/16	6.32
595-46T	1-3/4	2-1/8	1/16	6.96
595-48T	2	2-3/8	1/16	7.04
595-49ST	2-1/8	2-1/2	1/16	7.20
595-54T	2-1/2	2-15/16	1/16	7.68
595-57ST	2-13/16	3-1/4	1/16	5.04
595-58T	3	3-7/16	1/16	8.00
595-66ST	3-1/2	4	1/16	8.96
595-66T	3-1/2	4	1/16	8.96
595-68T	4	4-1/2	1/16	9.44
595-70ST	4-1/2	5	1/16	10.92
595-70T	4-1/2	5	1/16	10.92
595-73ST	4-7/16	5	1/16	8.11

Part Number	I.D.	O.D.	HT.	List Price
595-75T	5	5-9/16	1/16	\$ 13.20
595-5.12X6ST	5-1/8	6	1/8	22.94
595-5.2X6T	5-1/4	6	1/8	18.14
595-79ST	5-3/8	6	1/16	15.20
595-5.43X6ST	5-7/16	6	1/16	18.16
595-83ST	6-3/8	7	1/16	16.06
595-6.43X7ST	6-7/16	7	1/16	18.72
595-84ST	7-3/8	8	1/16	18.08
595-85ST	9-5/16	10	1/16	23.94
595-11X12ST	11	12	1/16	24.89
595-86ST	11-1/4	12	1/16	22.44
595-87ST	13	14	1-16	31.22
595-13.18X14ST	13-3/16	14	1/16	33.35

BACK-UP RING KITS

BACK-UP RING KIT

Part Number: 574 Kit

List Price: \$55.55

PART NUMBER	QUANTITY	PART NUMBER	QUANTITY
574-005	10	574-114	10
574-006	10	574-115	10
574-007	10	574-116	10
574-008	10	574-117	5
574-009	10	574-118	5
574-010	10	574-119	5
574-011	10	574-120	5
574-012	10	574-121	5
574-013	10	574-210	7
574-014	10	574-211	7
574-015	10	574-212	7
574-016	10	574-213	7
574-017	10	574-214	5
574-018	10	574-215	5
574-110	10	574-216	5
574-111	10	574-217	5
574-112	10	574-218	5
574-113	10	574-219	5



This 293 piece kit contains 36 of the most popular size "Parback®" Style Dished Cross Section back-up rings. Molded of 90A Durometer Buna-N Rubber, they stretch for installation and return quickly to their original size. SIZES CORRESPOND TO O-RING NUMBERS. Your shop and service truck should not be without this handy kit.

BACK-UP RING KIT

Part Number: 575 Kit

List Price: \$120.80



This 475 piece kit contains 24 of the most popular size Urethane Back-up Rings. This assortment is essential for parts counters, shop use and service trucks.

PART NUMBER	QUANTITY	PART NUMBER	QUANTITY
575-111	25	575-216	25
575-112	25	575-217	15
575-113	25	575-218	15
575-114	25	575-219	15
575-115	25	575-220	15
575-116	25	575-221	15
575-210	25	575-222	15
575-211	25	575-223	15
575-212	25	575-224	15
575-213	25	575-325	10
575-214	25	575-326	10
575-215	25	575-327	10

BACK-UP RING KITS

BACK-UP RING KITS

PTFE BACK-UP RING KIT

Part Number: 575 PTFE Kit S
List Price: \$126.66

PART NUMBER	QUANTITY	PART NUMBER	QUANTITY
575-005ST	15	575-114ST	10
575-006ST	15	575-115ST	10
575-007ST	15	575-116ST	10
575-008ST	15	575-117ST	5
575-009ST	15	575-118ST	5
575-010ST	15	575-119ST	5
575-011ST	15	575-120ST	5
575-012ST	15	575-121ST	5
575-013ST	10	575-210ST	5
575-014ST	10	575-211ST	5
575-015ST	10	575-212ST	5
575-016ST	10	575-213ST	5
575-017ST	10	575-214ST	5
575-018ST	10	575-215ST	5
575-110ST	10	575-216ST	5
575-111ST	10	575-217ST	5
575-112ST	10	575-218ST	5
575-113ST	10	575-219ST	5



This 325 piece kit contains 36 of the most popular size PTFE Back-up Rings. These rings are compatible with all hydraulic fluids, since they are virtually chemically inert, and can be used in applications involving elevated operating temperatures. These rings are scarf cut to facilitate installation.

Is there an assortment that you use that we don't offer?

Let us know what you need and we will give you a quote!